



GYRU-STAR 3-150SL

TECHNICAL SPECIFICATIONS

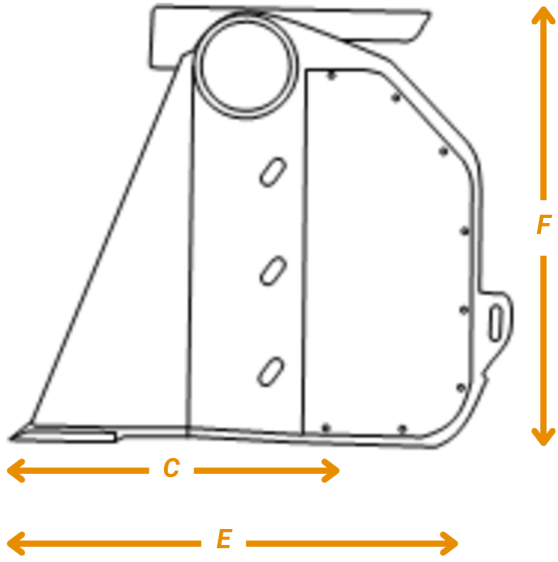

CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
3 - 4 t Skid Steers	430 mm x 1500 mm	0.35 m ³	701 kg	70 l/min

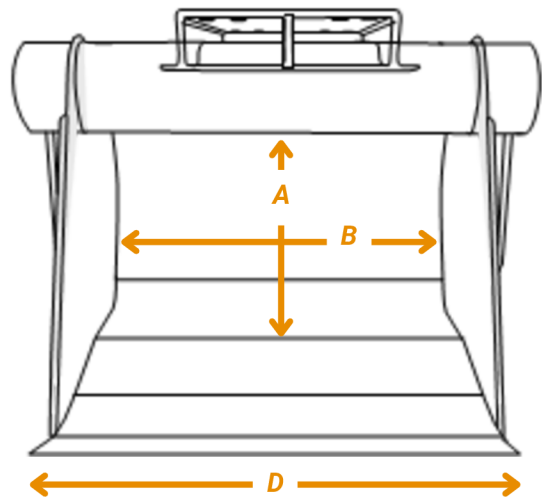

A

B

C

D

E

F

430 mm

1500 mm

520 mm

1470 mm

890 mm

730 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.