


GYRU-STAR 3-60E

TECHNICAL SPECIFICATIONS



CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
2 - 4 t Excavators	430 mm x 560 mm	0.13 m ³	240 kg	55 l/min

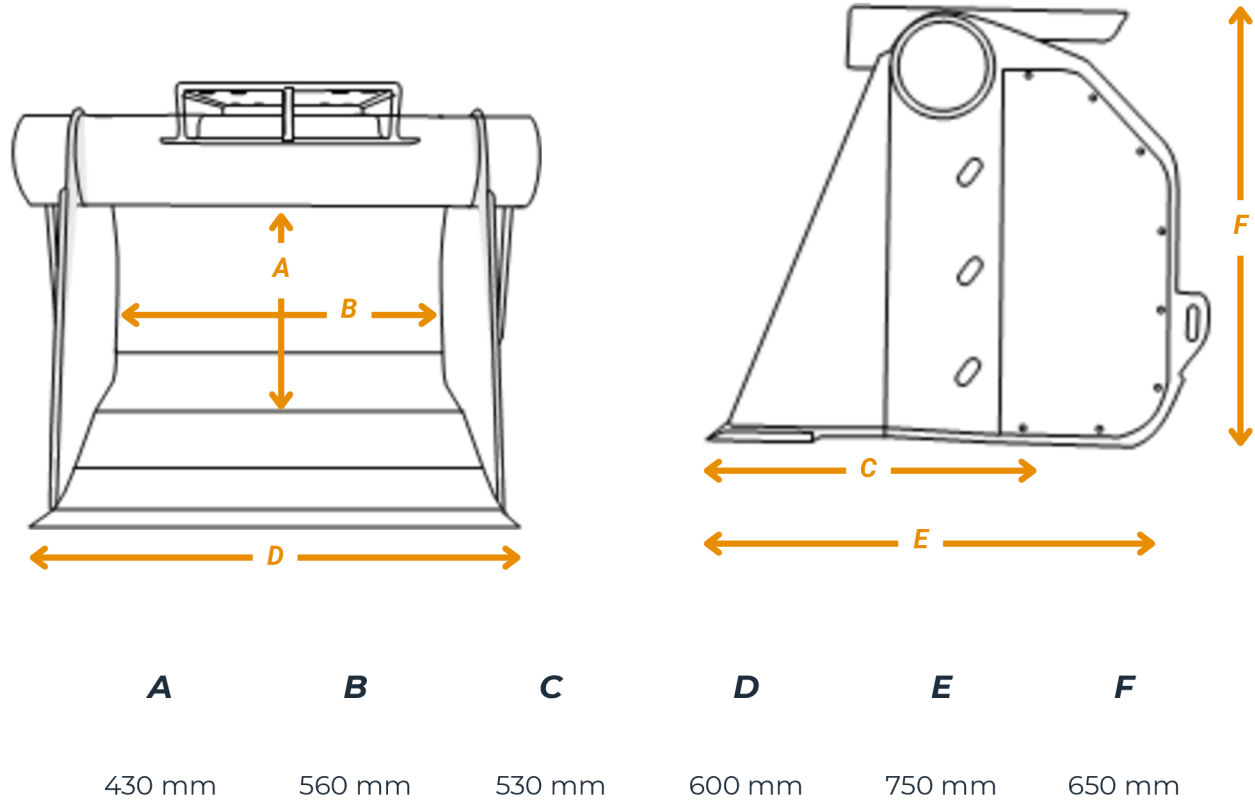

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.