

GYRU-STAR 3-120HE

TECHNICAL SPECIFICATIONS



CARRIERS

5 - 7 t Excavators

SCREENING AREA

430 mm x 1200 mm

CAPACITY



0.28 m³

WEIGHT

437 kg

FLOW RATE

65 l/min

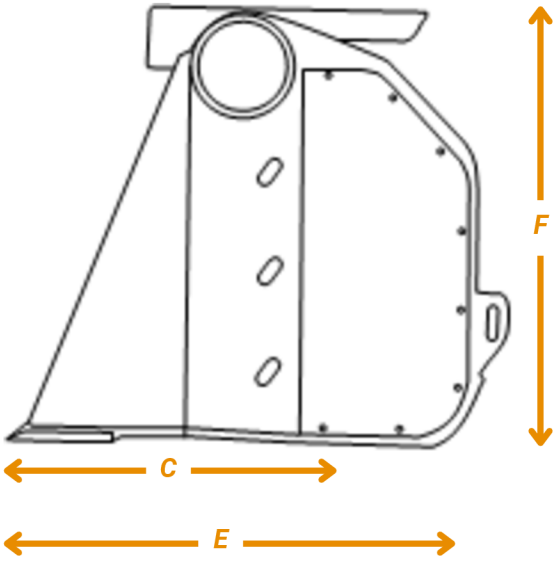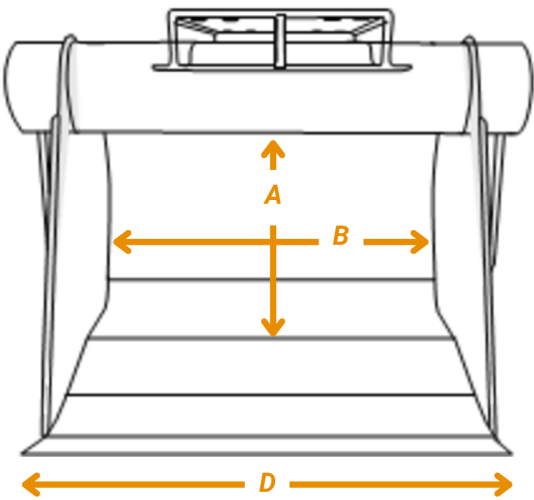

A	B	C	D	E	F
430 mm	1200 mm	620 mm	1470 mm	930 mm	730 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.