



# GYRU-STAR 2-100MAX

## TECHNICAL SPECIFICATIONS

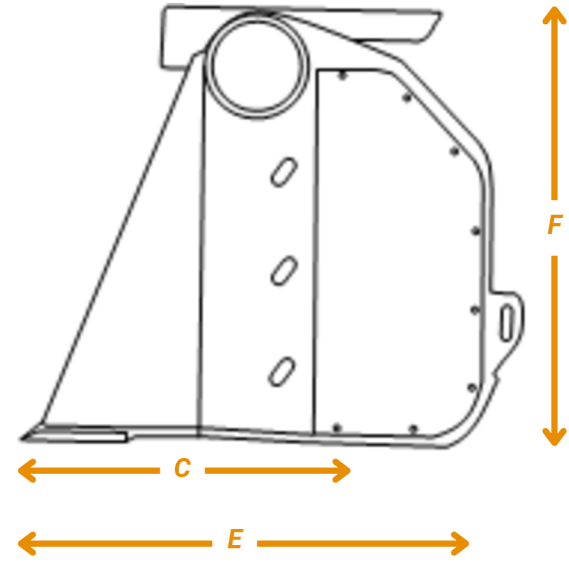

| CARRIERS               | SCREENING AREA   | CAPACITY            | WEIGHT | FLOW RATE |
|------------------------|------------------|---------------------|--------|-----------|
| 2.5 - 3.5 t Excavators | 300 mm x 1000 mm | 0.12 m <sup>3</sup> | 260 kg | 40 l/min  |

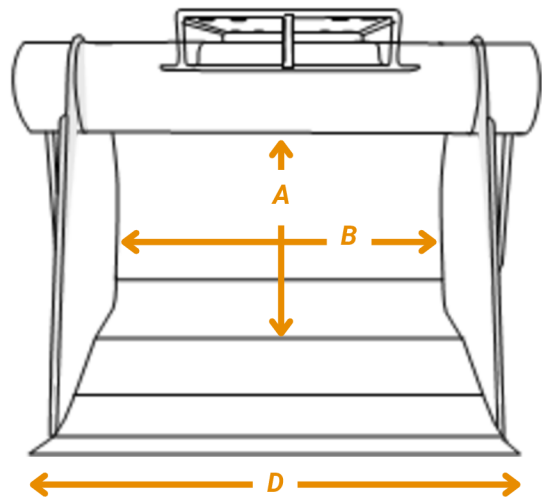

| A      | B       | C      | D       | E      | F   |
|--------|---------|--------|---------|--------|-----|
| 300 mm | 1000 mm | 570 mm | 1300 mm | 810 mm | 510 |

**Please Note:** The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.