



GYRU-STAR 3-150HDX

TECHNICAL SPECIFICATIONS

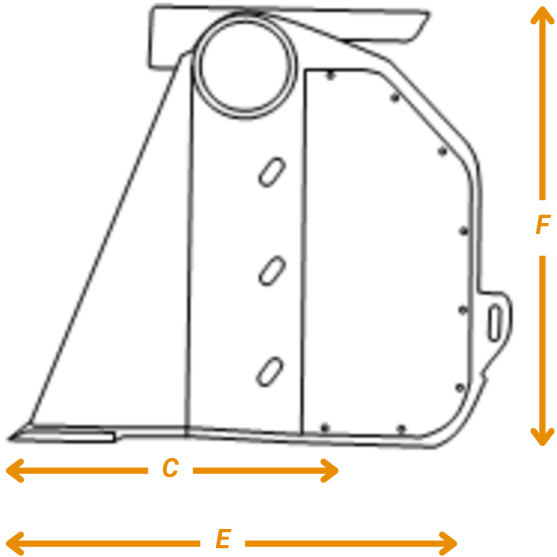

CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
7 - 10 t Excavators	430 mm x 1500 mm	0.35 m ³	600 kg	90 l/min

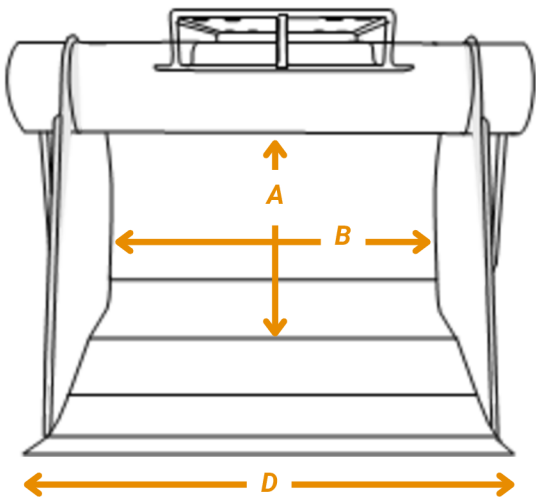

A	B	C	D	E	F
430 mm	1500 mm	620 mm	1790 mm	930 mm	720 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.