

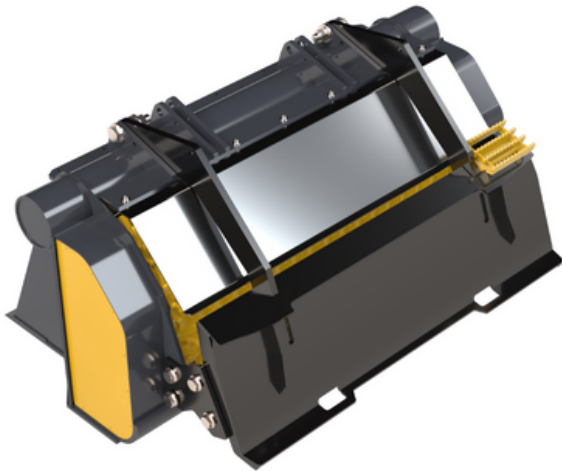


GYRU-STAR 4-150SL

TECHNICAL SPECIFICATIONS

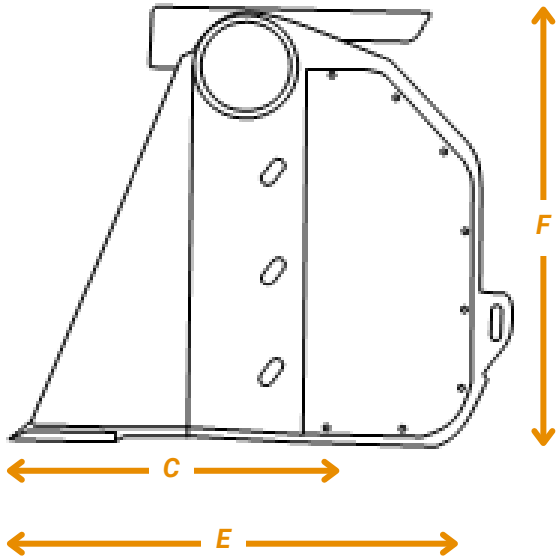

CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
> 4 t Skid Steers	615 mm x 1500 mm	0.60 m ³	924 kg	90 l/min

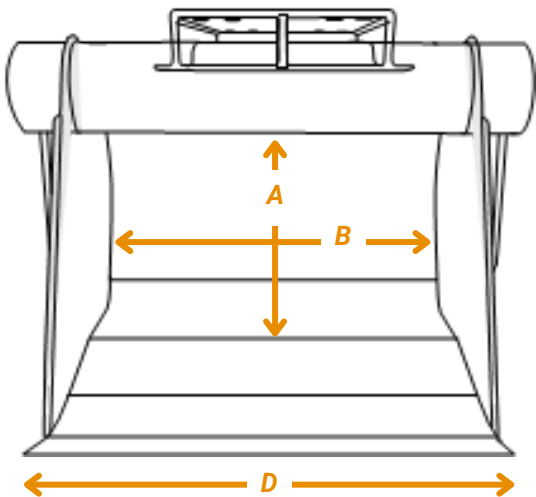

A	B	C	D	E	F
615 mm	1500 mm	725 mm	1900 mm	1030 mm	905 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.