

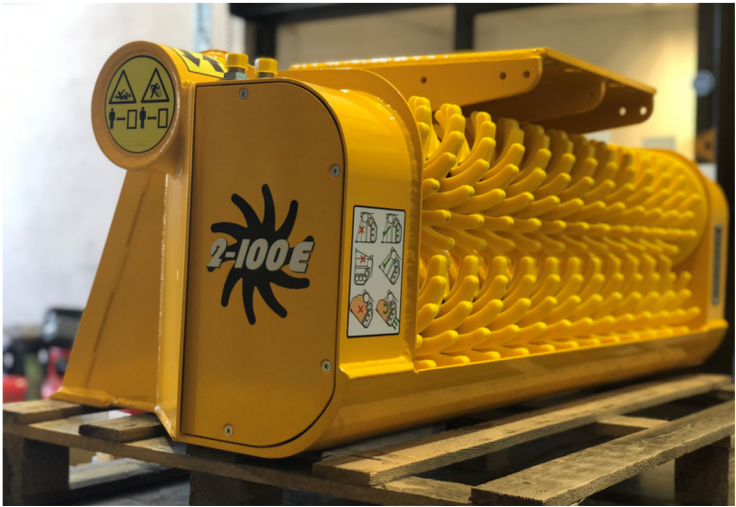


GYRU-STAR 2-100E

TECHNICAL SPECIFICATIONS

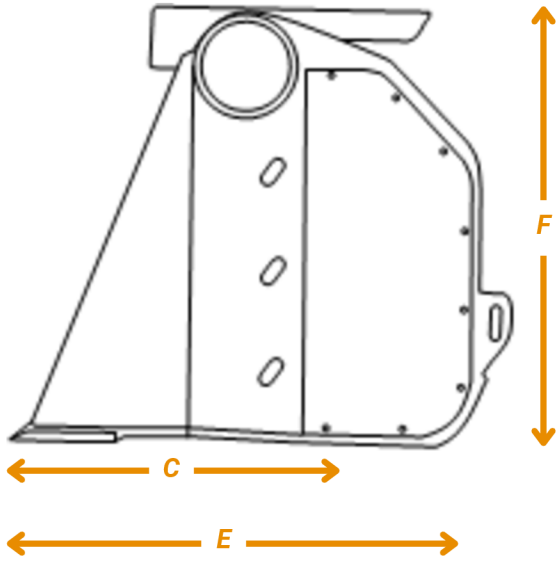

CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
1.7 - 2.7 t Excavators	300 mm x 1000 mm	0.12 m ³	240 kg	40 l/min

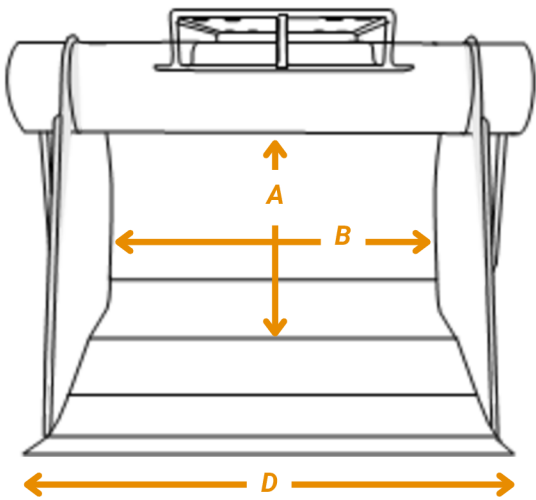

A	B	C	D	E	F
300 mm	1000 mm	370 mm	1300 mm	590 mm	510 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.