



GYRU-STAR 3-120SL

TECHNICAL SPECIFICATIONS

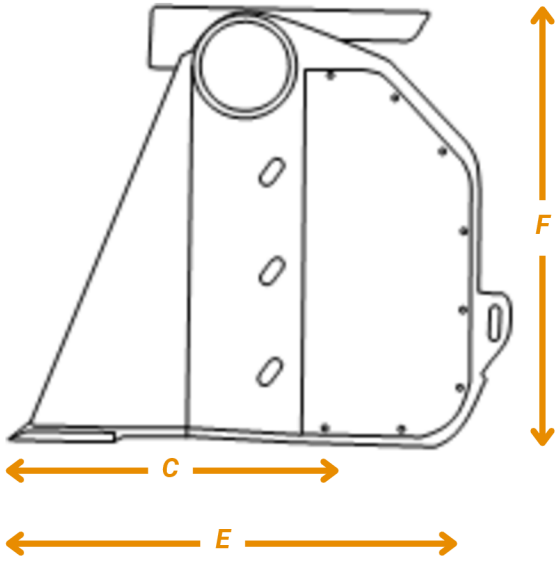

CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
2 - 3 t Skid Steers	430 mm x 1200 mm	0.26 m ³	465 kg	65 l/min

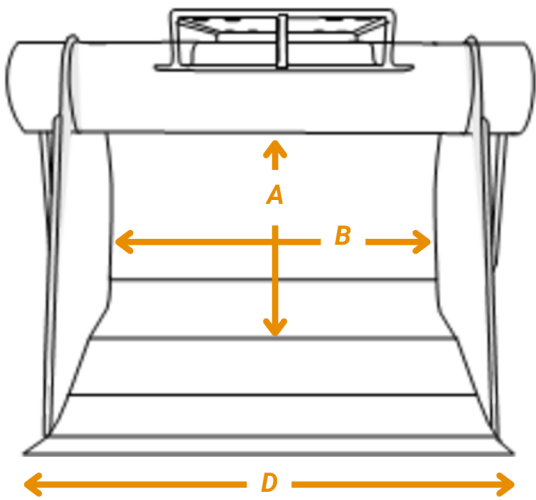

A	B	C	D	E	F
430 mm	1200 mm	415 mm	1470 mm	890 mm	730 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.