

GYRU-STAR 3-80E

TECHNICAL SPECIFICATIONS



CARRIERS

3 - 5 t Excavators

SCREENING AREA

430 mm x 800 mm

CAPACITY



0.18 m³

WEIGHT

260 kg

FLOW RATE

55 l/min

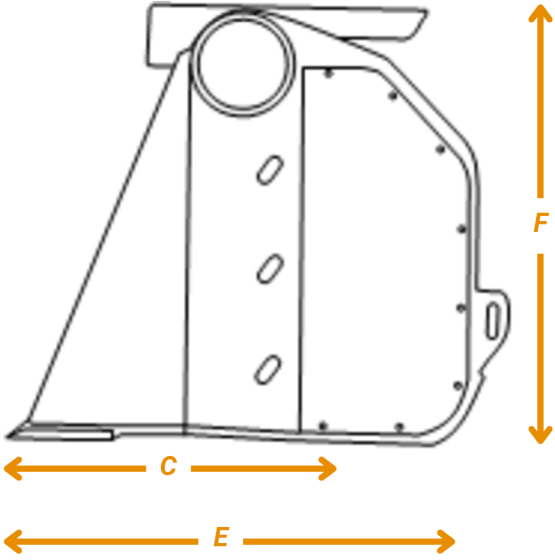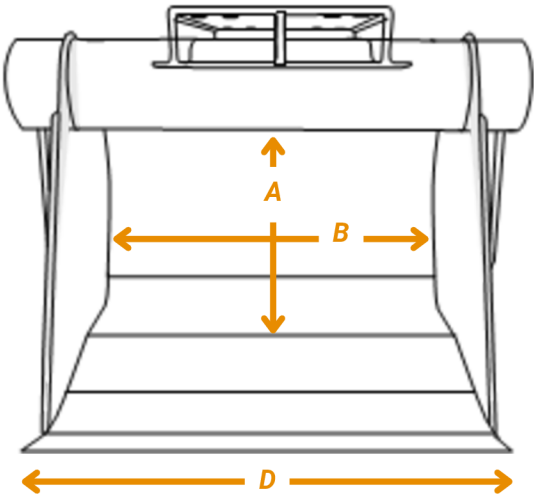

A	B	C	D	E	F
430 mm	800 mm	530 mm	1070 mm	760 mm	650 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.