



GYRU-STAR 6-150HDX

TECHNICAL SPECIFICATIONS

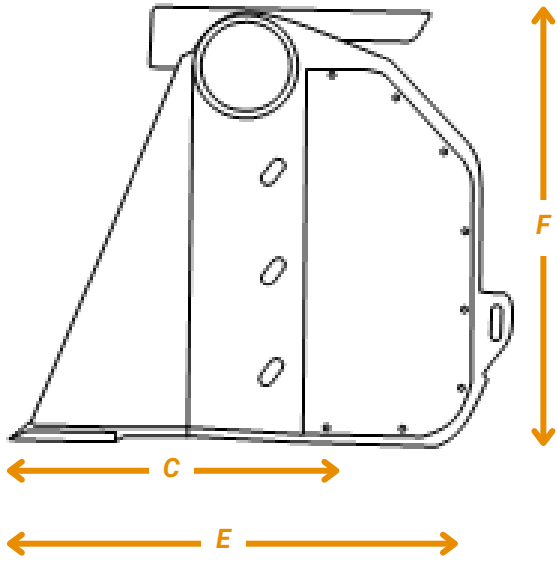

CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
18 - 24 t Excavators	920 mm x 1500 mm	1.20 m ³	1148 kg	150 l/min

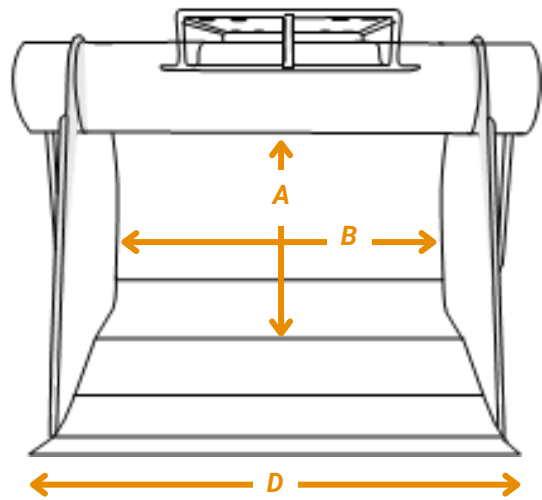

A	B	C	D	E	F
920 mm	1500 mm	1000 mm	1900 mm	1300 mm	1250 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.