


GYRU-STAR 5-120HE

TECHNICAL SPECIFICATIONS



CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
14 - 20 t Excavators	845 mm x 1200 mm	0.60 m ³	855 kg	90 - 150 l/min

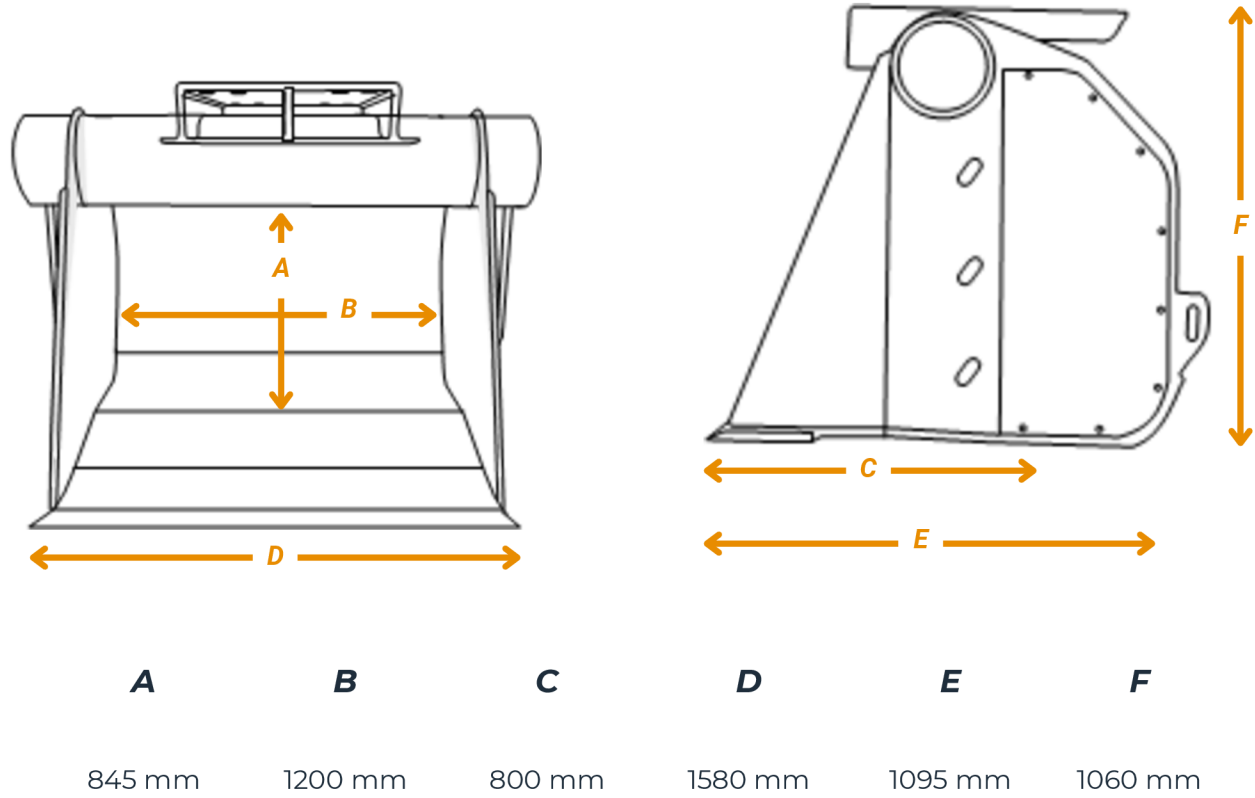

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.