



GYRU-STAR 4-100MAX

TECHNICAL SPECIFICATIONS

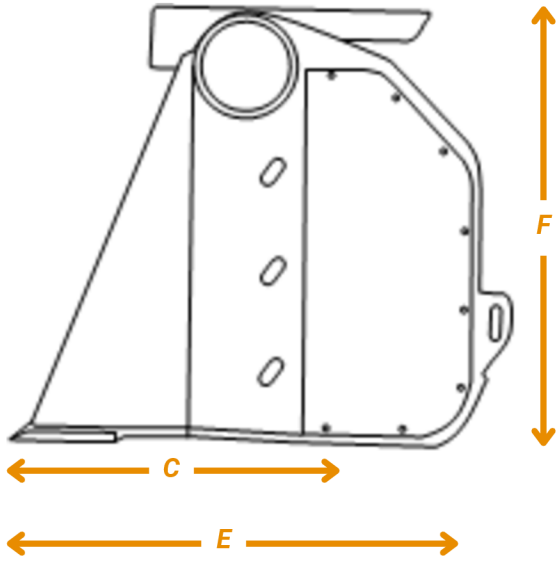

CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
10 - 13 t Excavators	615 mm x 1000 mm	0.50 m ³	715 kg	90 l/min

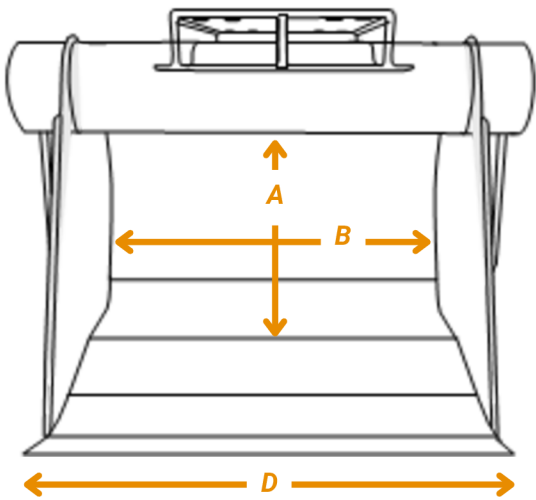

A	B	C	D	E	F
615 mm	1000 mm	570 mm	1370 mm	1400 mm	890 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.