


GYRU-STAR 6-150MAX

TECHNICAL SPECIFICATIONS



CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
20 - 30 t Excavators	920 mm x 1500 mm	1.60 m ³	1370 kg	150 l/min

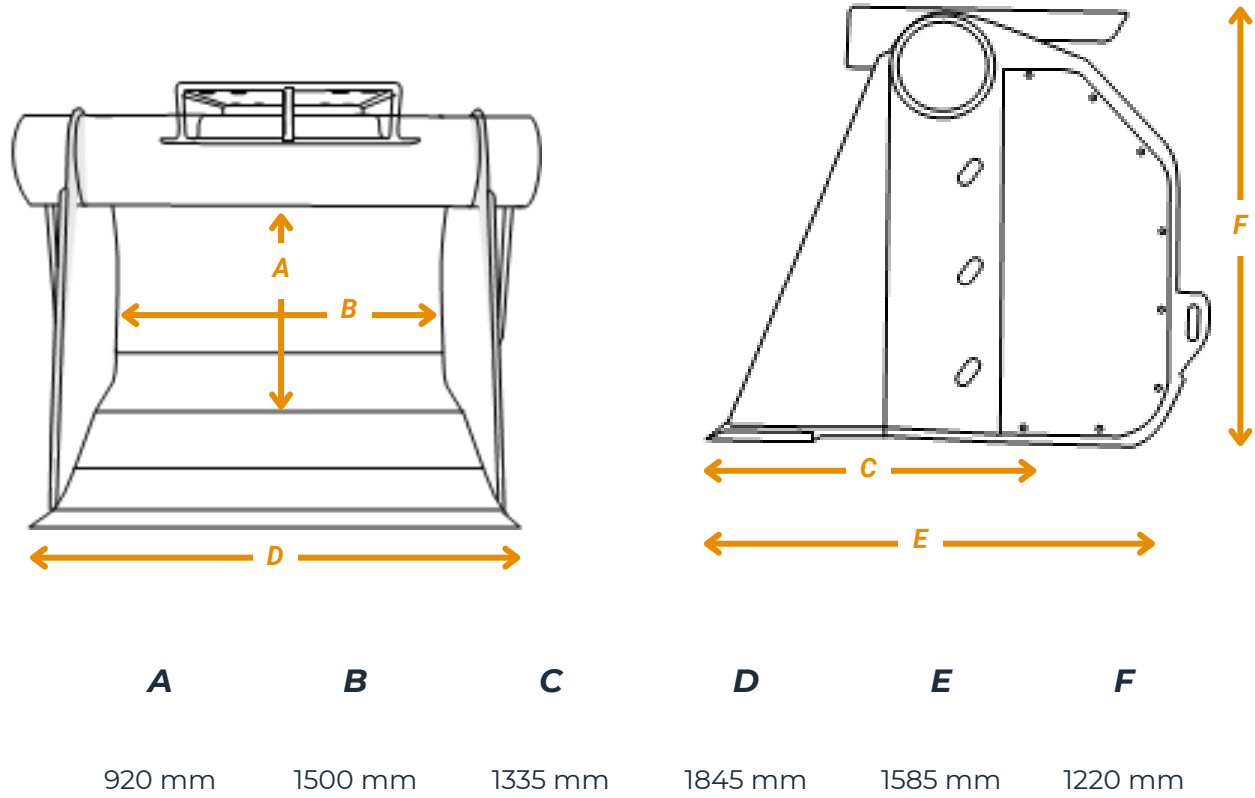

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.