


GYRU-STAR 4-150HDX

TECHNICAL SPECIFICATIONS



CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
14 - 20 t Excavators	615 mm x 1500 mm	0.60 m ³	836 kg	90 l/min

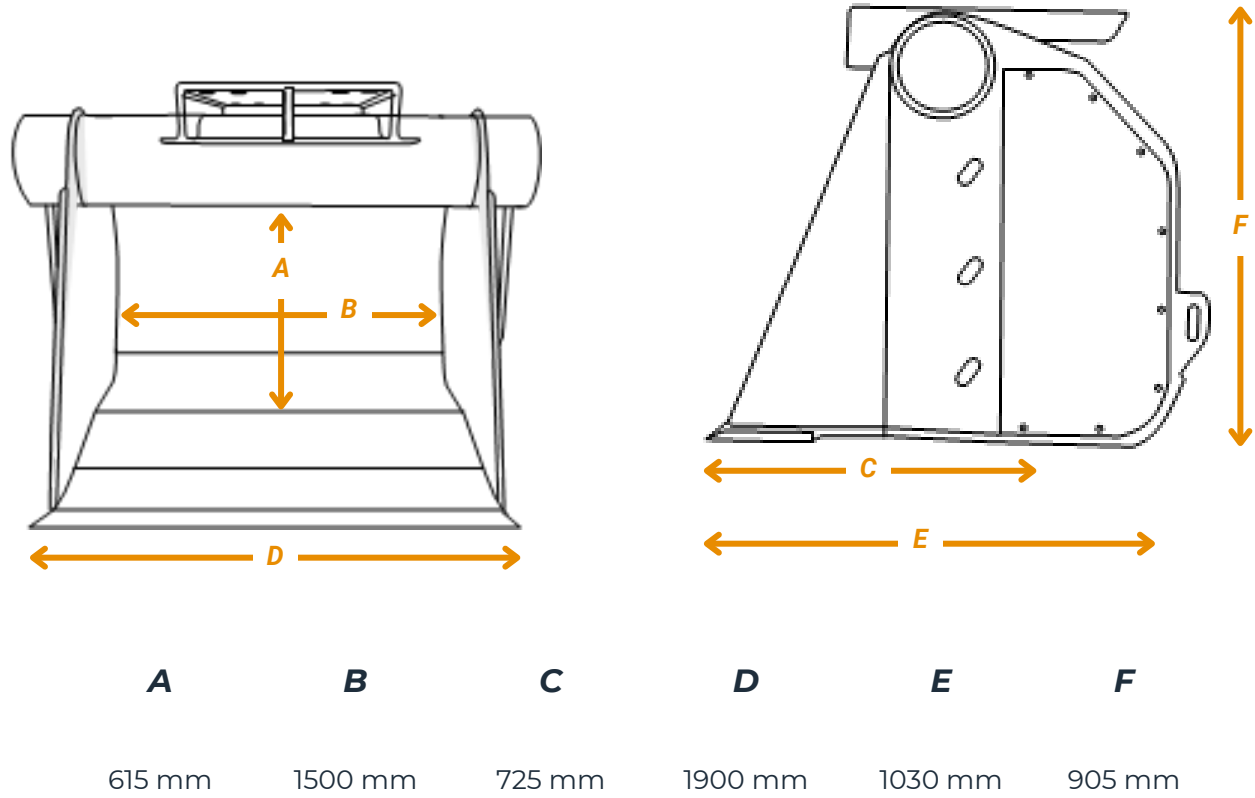

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.