

GYRU-STAR 4-120MAX

TECHNICAL SPECIFICATIONS



CARRIERS

13 - 16 t Excavators

SCREENING AREA

615 mm x 1200 mm

CAPACITY


0.60 m³

WEIGHT

740 kg

FLOW RATE

90 l/min

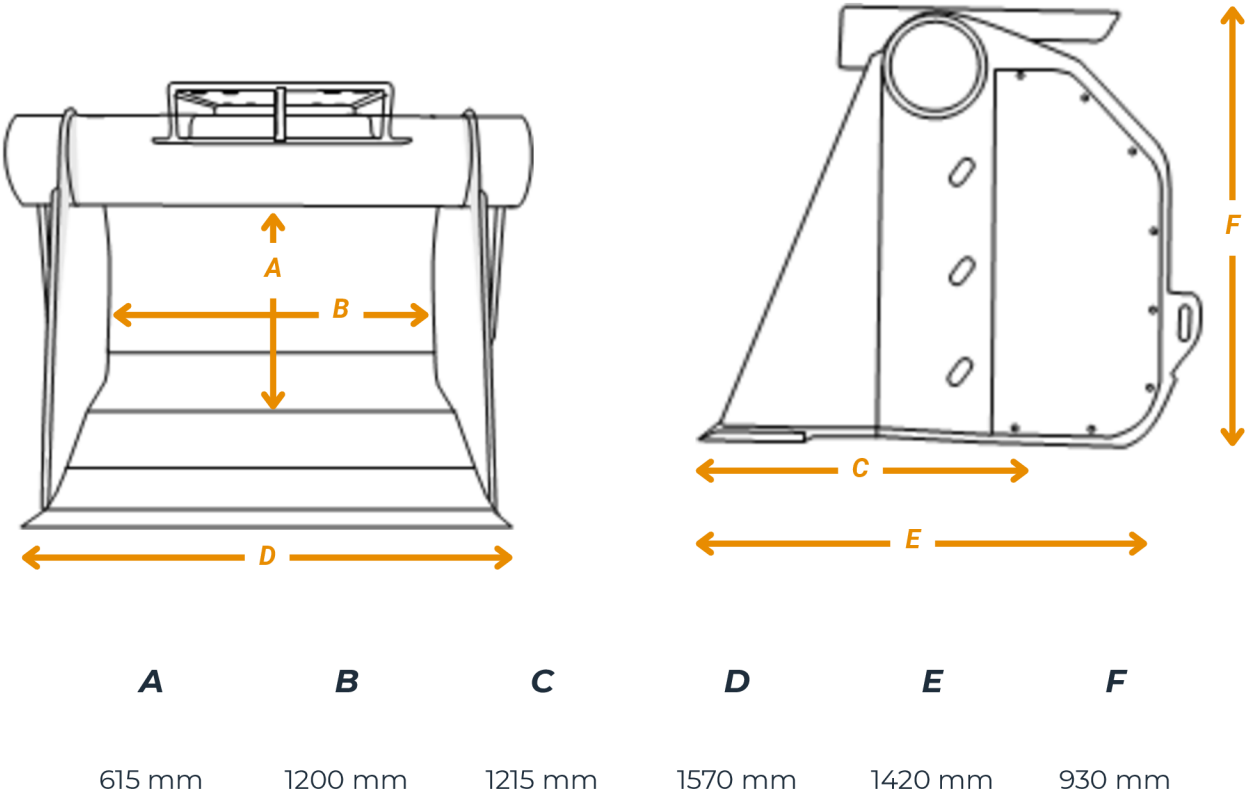

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.