



GYRU-STAR 4-120HE

TECHNICAL SPECIFICATIONS

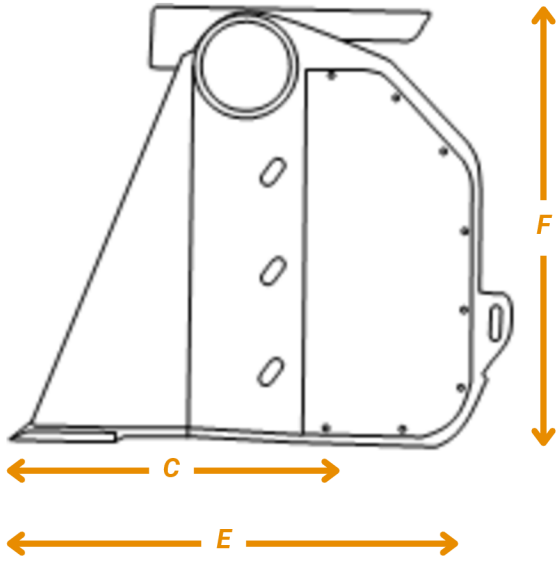

CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
10 - 13 t Excavators	615 mm x 1200 mm	0.40 m ³	552 kg	90 l/min

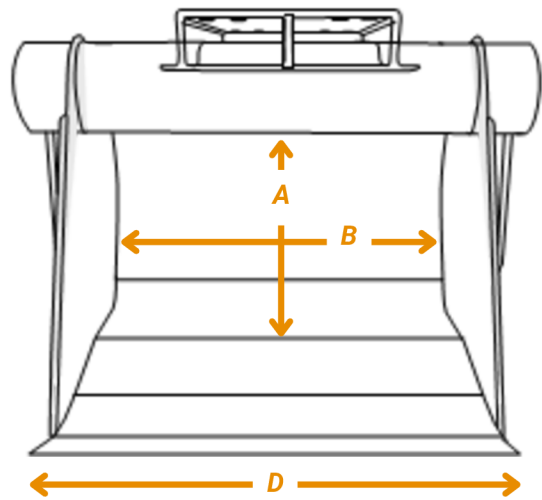

A	B	C	D	E	F
590 mm	1200 mm	655 mm	1570 mm	990 mm	895 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.