



GYRU-STAR 2-50E

TECHNICAL SPECIFICATIONS

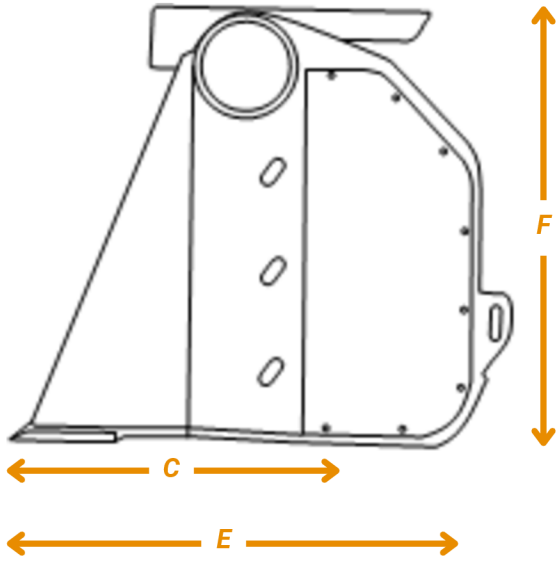

CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
1 - 2 t Excavators	300 mm x 480 mm	0.06 m ³	121 kg	40 l/min

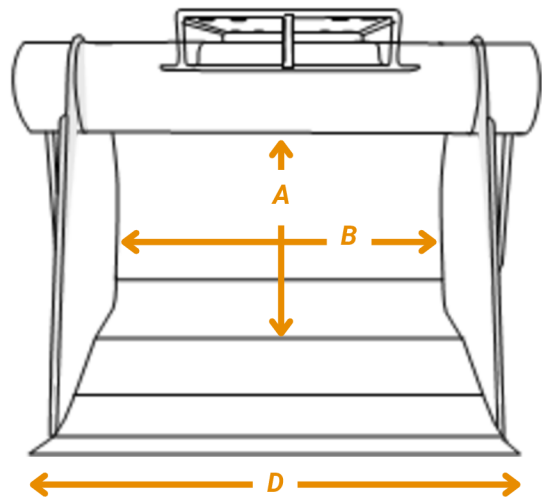

A	B	C	D	E	F
300 mm	480 mm	355 mm	500 mm	600 mm	520 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.