



GYRU-STAR 3-150L

TECHNICAL SPECIFICATIONS

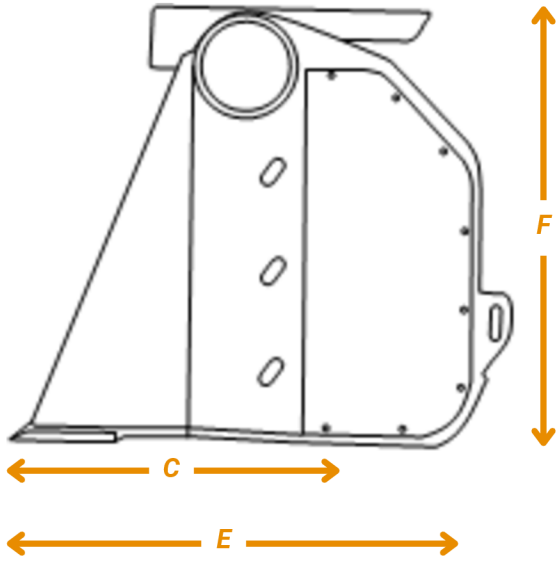

CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
< 6 t Loaders	430 mm x 1500 mm	0.35 m ³	600 kg	70 l/min

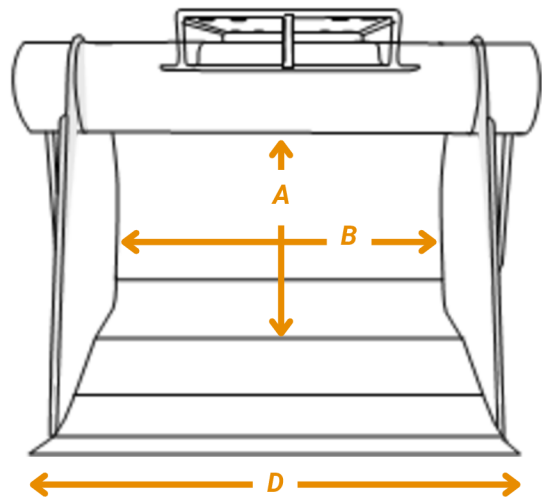

A	B	C	D	E	F
430 mm	1500 mm	520 mm	1470 mm	890 mm	730 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.