



GYRU-STAR 3-100HE

TECHNICAL SPECIFICATIONS

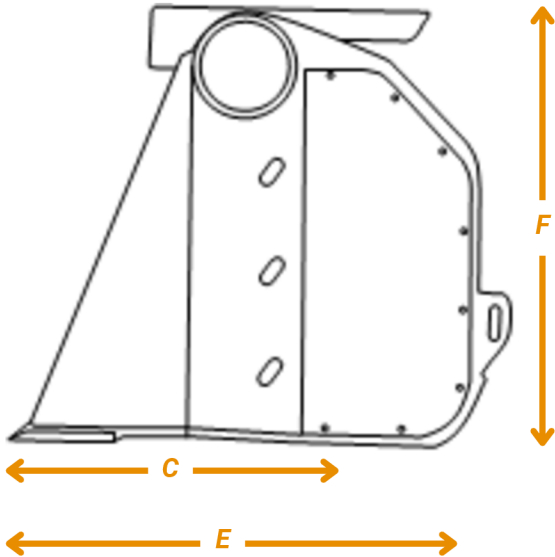

CARRIERS	SCREENING AREA	CAPACITY	WEIGHT	FLOW RATE
4 - 6 t Excavators	430 mm x 1000 mm	0.23 m ³	320 kg	65 l/min

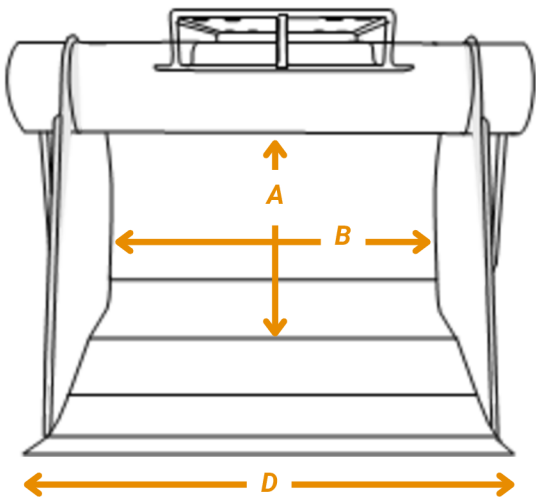

A	B	C	D	E	F
430 mm	1000 mm	520 mm	1260 mm	760 mm	720 mm

Please Note: The given weight is for a bucket fitted with a 20 mm fragment kit. The weight may vary depending on the fragment size selected. The compatible carrier weight range may change if the screening bucket is used in conjunction with a tiltrotator.